




LIVE UP TO GOOD SUNSHINE

NKM-120 N-type (182mm Cell)

480-500 Watt

BIFACIAL MODULE


Industry-leading Warranty based on nominal power

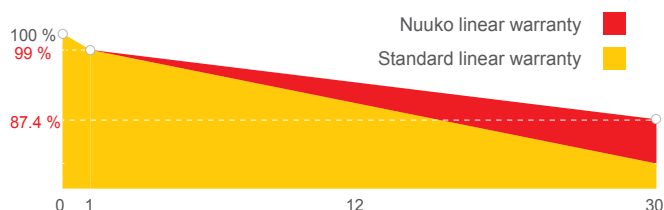

* 0.4% Annual Degradation over 30 Years

* 12 Year Product Warranty

* 30 Year Linear Power Warranty

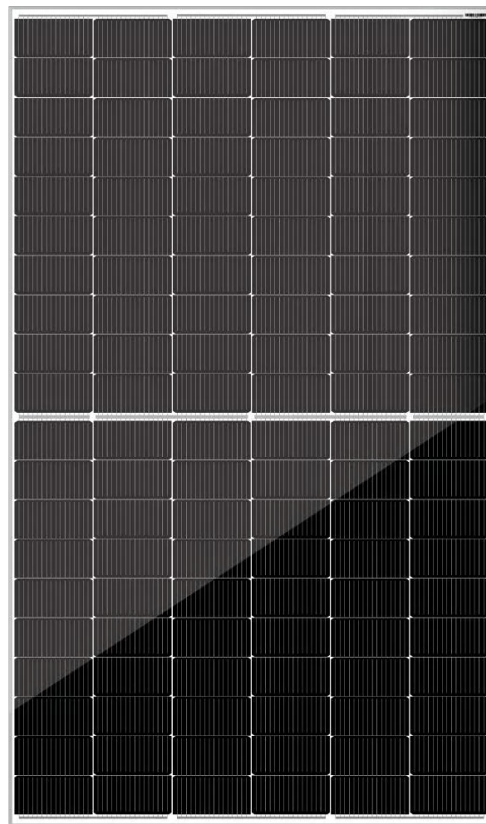

Features



SMBB Technology

Better light trapping and current collection to improve module power output and reliability.



Hot 2.0 Technology

The N-type module with Hot 2.0 technology has better reliability and lower LID/LETID.



Excellent weak light performance

More power output in weak light condition, such as cloudy, morning and sunset



Extended wind and snow load tests

Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal) *



PID Resistance

Excellent Anti-PID performance guarantee via optimized mass-production process and materials control.




Lower LCOE

Higher bifaciality, higher power output and lower BOS cost

MECHANICAL SPECIFICATIONS

Cell Type	N type Mono-crystalline
Cell Arrangement	120 (6*20)
Weight	27KG
Module Dimensions	1908*1134*30mm
Cable Length	4.0mm ² , ±300mm or Customized length
Front Glass	2.0mm, Anti-Reflection Coating
Back Glass	2.0mm, Heat Strengthened Glass
No. of Bypass Diodes	3/6
Packing Configuration (1)	36pcs/pallet, 864pcs/40HQ
Frame	Anodized Aluminium
Junction Box	IP68

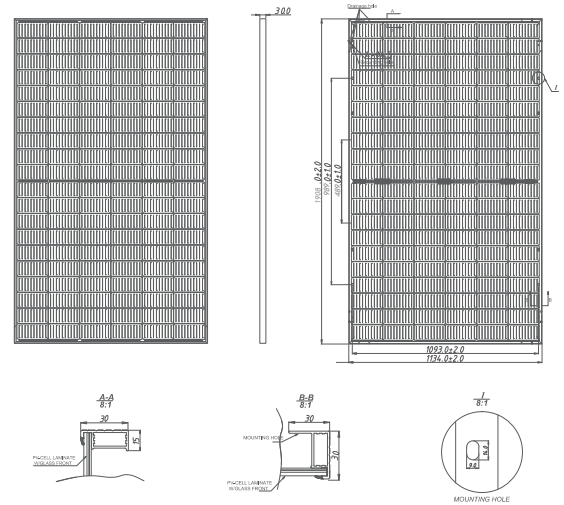

ELECTRICAL SPECIFICATIONS

Module Type	NKM480N-120BDM10		NKM485N-120BDM10		NKM490N-120BDM10		NKM495N-120BDM10		NKM500N-120BDM10	
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Rated output (Pmp/Wp)	480	362	485	366	490	370	495	374	500	377
Maximum Power Voltage(Vmpp/V)	35.6	33.1	35.8	33.3	35.9	33.4	36.1	33.6	36.2	33.7
Maximum Power Current(Imp/A)	13.48	10.95	13.55	11.01	13.65	11.07	13.71	11.13	13.81	11.19
Open Circuit Voltage(Voc/V)	42.9	40.7	43.1	40.8	43.2	40.9	43.4	41.1	43.5	41.2
Short Circuit Current(Isc/A)	14.27	11.58	14.34	11.65	14.41	11.72	14.48	11.79	14.55	11.86
Module efficiency(%)	22.2%		22.4%		22.6%		22.9%		23.1%	
Power Tolerance (W)	0~+5		0~+5		0~+5		0~+5		0~+5	

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5 NMOT: Irradiance at 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s

BIFACIAL OUTPUT-REAR SIDE POWER GAIN

5%	Maximum Power(Pmax)	504	509	515	520	525
	Module Efficiency STC (%)	23.3%	23.5%	23.8%	24.0%	24.3%
15%	Maximum Power(Pmax)	552	558	564	569	575
	Module Efficiency STC (%)	25.5%	25.8%	26.1%	26.3%	26.6%
25%	Maximum Power(Pmax)	600	606	613	619	625
	Module Efficiency STC (%)	27.7%	28.0%	28.3%	28.6%	28.9%


MAXIMUM RATINGS

Maximum System Voltage	1500V DC (IEC)
Operating Temperature	-40°C ~ +85°C
Maximum Series Fuse	25A
Static Loading	Snow Loading: 5400Pa/ Wind Loading: 2400Pa
Protection Class	II
Fire Type	Class C (IEC)
Bifacial	80±5%


TEMPERATURE CHARACTERISTICS

NMOT Temperature	45°C±2°C
Temperature Coefficient (Pmax)	-0.29%/°C
Temperature Coefficient (Voc)	-0.25%/°C
Temperature Coefficient (Isc)	0.045%/°C

CURVE & TEMPERATURE DEPENDENC

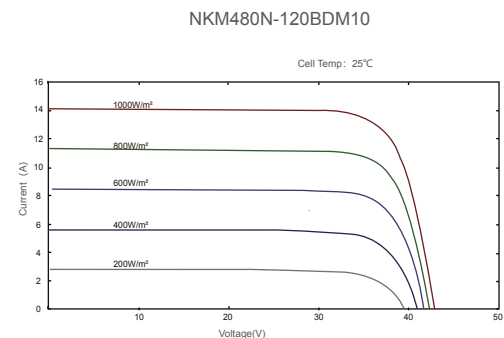

Power voltage current curve at different temperature



Nuuko Power Co., Ltd.
Info@nuukopower.com