




LIVE UP TO GOOD SUNSHINE

NKM-144 N-type (182mm Cell)

565-585 Watt

MONOFACIAL MODULE

Industry-leading Warranty based on nominal power

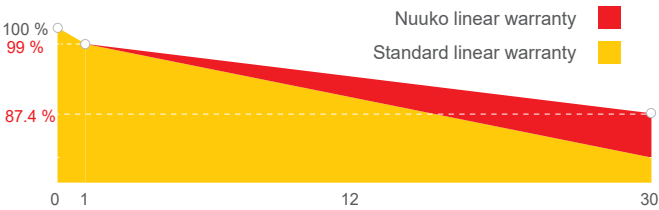

- * 0.4% Annual Degradation over 30 Years
- * 12 Year Product Warranty
- * 30 Year Linear Power Warranty



Features



SMBB Technology

Better light trapping and current collection to improve module power output and reliability.



Hot 2.0 Technology

The N-type module with Hot 2.0 technology has better reliability and lower LID/LETID.



Excellent weak light performance

More power output in weak light condition, such as cloudy, morning and sunset



Extended wind and snow load tests

Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal) *



PID Resistance

Excellent Anti-PID performance guarantee via optimized mass-production process and materials control.




Lower LCOE

Higher bifaciality, higher power output and lower BOS cost

MECHANICAL SPECIFICATIONS

Cell Type	N type Mono-crystalline
Cell Dimensions	182*182mm
Cell Arrangement	144 (6*24)
Weight	28KG
Module Dimensions	2278*1134*35mm
Cable Length	Portrait 300mm/Landscape 1200mm/Customized
Cable Cross Section Size	TUV: 4mm ² /UL: 12AWG
Front Glass	3.2mm AR Coating Tempered Glass
No. of Bypass Diodes	3/6
Packing Configuration (1)	31pcs/Pallet, 620pcs/40HQ
Frame	Anodized Aluminium Alloy
Junction Box	IP68

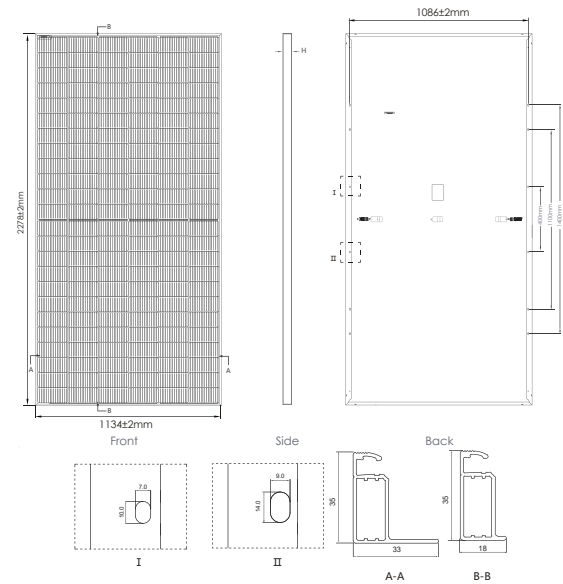

ELECTRICAL SPECIFICATIONS


Module Type	NKM565N-144M10		NKM570N-144M10		NKM575N-144M10		NKM580N-144M10		NKM585N-144M10	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Testing Condition										
Rated output (Pmp/Wp)	565	425	570	429	575	432	580	436	585	440
Maximum Power Voltage(Vmpp/V)	42.1	39.5	42.3	39.7	42.4	39.8	42.6	39.9	42.8	40.0
Maximum Power Current(Imp/A)	13.42	10.76	13.48	10.81	13.56	10.86	13.62	10.93	13.67	10.98
Open Circuit Voltage(Voc/V)	50.9	48.3	51.1	48.5	51.3	48.7	51.5	48.9	51.7	49.1
Short Circuit Current(Isc/A)	14.19	11.46	14.25	11.50	14.31	11.55	14.37	11.60	14.43	11.65
Module efficiency(%)	21.9%		22.1%		22.3%		22.5%		22.7%	
Power Tolerance (W)	0~+5		0~+5		0~+5		0~+5		0~+5	

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5 NMOT: Irradiance at 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s


MAXIMUM RATINGS

Maximum System Voltage	1000V/1500V DC (IEC)
Operating Temperature	-40°C ~ +85°C
Maximum Series Fuse	25A
Static Loading	Snow Loading: 5400Pa/ Wind Loading: 2400Pa
Conductivity at Ground	≤0.1Ω
Safety Class	II
Resistance	≥100MΩ

CURVE & TEMPERATURE DEPENDENCE

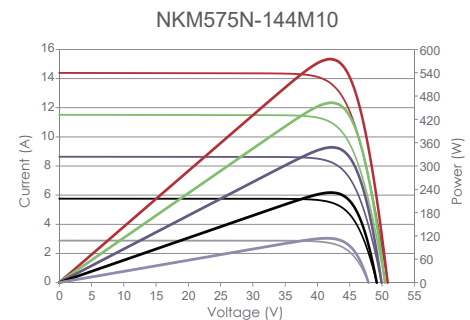

Temperature Dependence of Isc, Voc, Pmax



TEMPERATURE CHARACTERISTICS

NMOT Temperature	45°C±2°C
Temperature Coefficient (Pmax)	-0.30%/°C
Temperature Coefficient (Voc)	-0.25%/°C
Temperature Coefficient (Isc)	0.046%/°C



Nuuko Power Co., Ltd.
Info@nuukopower.com